SB series

ISOLATOR

SPEC. SHEET



Features

- Simple wiring using a plug-in socket
- Compact
- 3-port insulation (Input-Output-Power)

■ Model	SBV
Input	
01: 0 to 100mV DC	
02: 0 to 1V DC	
03: 0 to 5V DC	
04: 1 to 5V DC	
05: 0 to 10V DC	
Output	
01: 4 to 20mA DC	05: 0 to 1V DC
02: 0 to 20mA DC	06: 0 to 5V DC
03: 0 to 12mA DC	07: 1 to 5V DC
04: 0 to 10mA DC	08: 0 to 10V DC
Power supply	
0: 100 to 240V AC	


0: 100 to 240V AC 1: 24V DC

How to order

Specify a model. (e.g.) SBV-0101-0

■ Input specifications DC voltage

Input range	Input resistance	Allowable signal source resistance
0 to 100mV DC	1ΜΩ	200 Ω or less
0 to 1V DC		$2k\Omega$ or less
0 to 5V DC	100kΩ	
1 to 5V DC		100 Ω or less
0 to 10V DC		



Output specifications

When the output range lower limit is zero, (even if zero adjustment results in a negative value), the output value will not be negative.

DC current

Output	Allowable	Zero	Span
	load	adjustment	adjustment
range	resistance	range	range
4 to 20mA DC	600 Ω or less	-2.5 to 2.5%	97.5 to 102.5%
0 to 20mA DC	600 Ω or less	0 to 2.5%	97.5 to 102.5%
0 to 12mA DC			97.5 to 102.5%
0 to 10mA DC	1k Ω or less	0 to 2.5%	97.5 to 102.5%

DC voltage

- 2	se ronago			
Output	Output	Allowable	Zero	Span
	load	adjustment	adjustment	
	range	resistance	range	range
	0 to 1V DC	100 Ω or more	0 to 2.5%	97.5 to 102.5%
	0 to 5V DC	500 Ω or more	0 to 2.5%	97.5 to 102.5%
	1 to 5V DC	500 Ω or more	-2.5 to 2.5%	97.5 to 102.5%
	0 to 10V DC	1k Ω or more	0 to 2.5%	97.5 to 102.5%

Performance

Accuracy Response time	: Within $\pm 0.2\%$ of input span : 1 sec. (0 \rightarrow 90%)
	(Average 0.5 sec)
Temperature coefficier	nt: ±0.015%/°C
Insulation resistance	: 10M Ω or more, at 500V DC
	(Input-Output-Power)
Dielectric strength	: 2.0kV AC for 1 minute
· ·	(Input-Output-Power)




Instrument specifications

: Flame resistant resin Color: Light gray Case : Polycarbonate Front panel Spring type plug: Polyamide Color: Green Adjustment: By the front potentiometer Zero adjustment : ±2.5% Span adjustment : ±2.5% Indication: Power indicator (PWR): Green Lights when the power is turned on. Flashes in 500ms cycles when an error has occurred in non-volatile IC memory. Error indicator (ERR): Red Flashes in 250ms cycles when input is 110% or more. Flashes in 500ms cycles when input is -10% or less. Output status selection: Selects Normal or Reverse with the DIP switch.

No.1 OFF: Normal, ON: Reverse Momentary power failure: 30msec.

Self diagnosis:

The CPU is monitored by a watchdog timer, and when an abnormal status is found on the CPU, the unit restarts with the reset action.

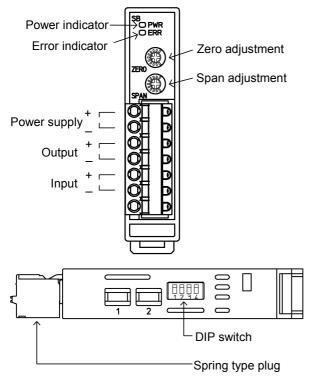

Installation specifications

Power supply

- 100 to 240V AC 50/60Hz
- Allowable voltage range: 85 to 264V AC Power consumption : Approx. 3.5VA
- 24V DC
- Allowable voltage range: 20 to 28V DC
- Power consumption : Approx. 3.5W
- Ambient temperature: -5 to 55°C
- Ambient humidity: 35 to 85%RH (non-condensing)Weight: Approx. 80g

Mounting method	: DIN rail mounting
-	Be sure to use fastening plates at
	both ends of the unit after the unit
	is mounted to the DIN rail.
External dimension	s:17.5 (W) x 75 (H) x 85 (D) mm

Environmental specification

RoHS directive compliance


Ferrules

Made by Phoenix Contact GMBH & CO.

Insulation sleeve attached

Model	Conductor cross section
AI0.25-6BU	$0.2 - 0.25 \text{mm}^2$
AI0.34-8TQ	$0.25 - 0.34 \text{mm}^2$
AI0.5-8WH	$0.34 - 0.5 \text{mm}^2$
AI0.75-8GY	$0.5 - 0.75 \text{mm}^2$
AI1-8RD	$0.75 - 1.0 \text{mm}^2$
AI1.5-8BK	$1.0 - 1.5 \text{mm}^2$
AI2.5-8BU	1.5 – 2.5mm ²
Crimping pliers	
CRIMPFOX ZA3	
CRIMPFOX UD6	

■ Circuit configuration, terminal arrangement



External dimensions (Scale: mm)

